

Welcome Blitzer

Thank you for choosing Blitz!

It's about time to start charging that battery...








#1 Blitz Power Station

Hardware

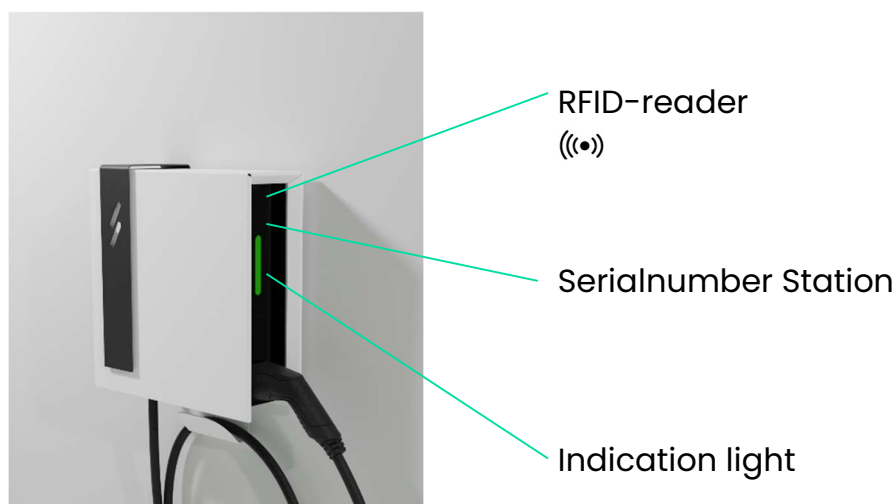

How does the BPS work?

Starting to charge

1. Make the connection between the vehicle and the charging station with the charge cable.
2. The indication light blinks green
3. Scan your chargecard at the RFID-reader
The charging station will *beep*
4. The charging stations starts charging.
The indication light blinks blue

Stop charging

1. Please check the vehicle instructions to terminate a charging session:
 - a. Open the vehicle via the key
 - b. Push the button next to the charging cable
2. Pull the charging cable out of the car
3. Store the charging cable neatly



BLITZ





Indication



Continu

No vehicle is connected but charger is ready for use



Blinking

Vehicle is connected, but not yet charging (awaiting authorisation)



Blinking

Vehicle is charging



Continu

The charger is not available

→ Contact the responsible



Blinking

External error caused by the vehicle

→ Take out charging cable and try again



Continu

The charging cable is reserved

Login Success! You are logged in as: manufacturer
Current version v1.2.1 is already up-to-date!

BLITZ

POWER CHARGER

Dashboard





#2 Blitz Webapp

What


The Blitz Webapp was created for our users and installers of the Blitz Power Station. With this app you can monitor and manage the charging station (or park), as well as adjust and configure settings.

So it is an offline platform that works in your own network and allows you to retrieve transactions, activate charging passes and so on.

Access

It is an "offline" app this means that you can only access the app when your PC or laptop is in the same Internet network as the charging station. In other words, you have to connect in the same physical location as where the charging station is located.

Surf to the address below for the web app:

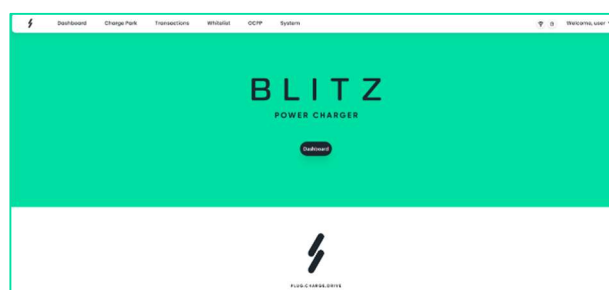

www.blitzpower.com/r/mybps

Login

Username: **user**

Paswoord: **user**

Activate your device for the first time registration! The first time, you will see the 'activate' button in the middle of the screen, click it and fill in all the requested information. After this, the charging station is activated, and you can sign yourself in.





Features

Charging stations	This menu displays all connected charging station(s) with their current status. This can be: available, occupied, charging, reserved, error.
Transactions	This menu displays all historical charging events. It can be filtered by year, month, charging pass,... and can also be sorted or exported.
Whitelist	This menu displays all charge cards. Here you can also deactivate cards, add a new one or import or export a list.
Load management	This menu is used to configure (dynamic) load management. This ensures safe charging and prevents overloading your electricity network by charging cars.
OCPP	This is a page to configure and monitor OCPP. OCPP is used to monitor the charging station online and to make it available for public and semi-public charging.
System	All general settings for the charging station can be found here.
Account settings	If you click on user at the top right, you can go to this menu to change your personal settings.
E-mail preferences	If you click on user at the top right, you can go to this menu to change your email settings. You can set, among other things, that you want to receive a monthly list of the transactions from the charging station.

Public charging

So to place your charging station(s) publicly, it is necessary to connect the charging station to an OCPP platform. There are quite a few to choose from. Among them:

- Mobiflow
- E-flux
- Mobilityplus
- Wattify

The platforms are more or less the same, but each provider has its own angle. For example, some focus more on public charging stations, while others focus more on energy-efficient charging, and so on.





Once you have chosen a provider, the charging station still needs to be configured so that the charging station connects to this provider. See our configuration manual for more information: www.blitzpower.com/r/configuratie-handleiding.

Defect

If so, contact the installer. The installer will then resolve the problem or contact Blitz Power themselves if necessary.

Is the Blitz Power Station not your charging station? If so, contact the owner or person in charge. Often it is just a minor problem that is quickly resolved.

Blitz chargecards

With each charge point, we always provide 1 Blitz charge card. Do you need more? Then you can easily order them from Blitz power via sales@blitzpower.com.

After receipt, you still need to add them to the whitelist via the Blitz Webapp, just follow the instructions.

Note: With these Blitz charging cards you can only charge at your own Blitz charging stations, they can NOT be used for public charging stations. For this you will have to contact an external charging station operator (e-MSP). But this charging card can in turn be added to our charging station via the whitelist, this way you only need to have 1 charging card for all your charging!

More questions?

Be sure to check one of the following information sources on our website:

Website

FAQ

News

Or contact us :

hello@blitzpower.com

03/250.12.29



PLUG.CHARGE.DRIVE.

Need help with **Installation** ?

Scan or surf to
www.blitzpower.com/r/manual/



Need help with **configuration** ?

Scan or surf to
www.blitzpower.com/r/configurationmanual/

